


# ***SUPER SHIELD***

## **PROTECTIVE SOLUTION**

# **V170**

Total weight: 28.2 g +/-  
Lens thickness: 2 mm +/-  
Lens base curves: 8  
Bridge width: 30 mm +/-  
Bridge height: 20 mm +/-  
Overall width (Hinge to hinge): 139 mm +/-  
Overall length (Lens to tips): 165 mm +/-

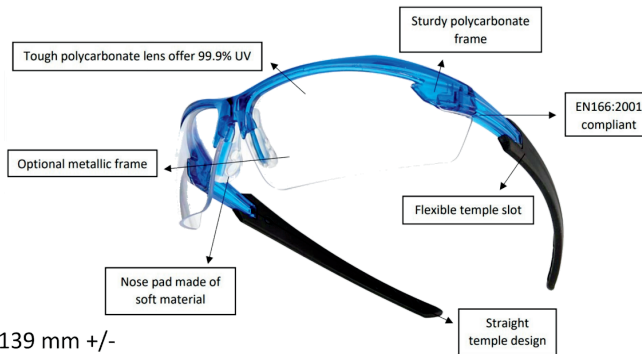

### **COMPONENT**

#### **SPECIFICATION**

Lens - Polycarbonate (PC)  
Frame - Polycarbonate (PC)  
Temple - Polycarbonate  
Tips - TPR  
Nose pad - PVC

### **PACKING**

Per box: 12 pcs  
Per carton: 25 boxes

#### **SPECIFICATION OF LENS**

Coated  
Uncoated  
Anti-fog  
Premium anti-fog

### **FIELD OF USE:**

K: Surface damage by fine particles  
N: Resistance to fogging

### **TYPE OF PROTECTION**

Infrared filter  
Ultraviolet filter  
Welding filters  
Sunglare filter

## **Applications**

AUTOMOTIVE | CONSTRUCTION | AEROSPACE |  
ENGINEERING | OIL & GAS | MARINE | FABRICATION

**MADE IN MALAYSIA**

**Complies to:**



**UK  
CA**